



The following example pictures display the connector can accept difference wire gauges.


UR Connector

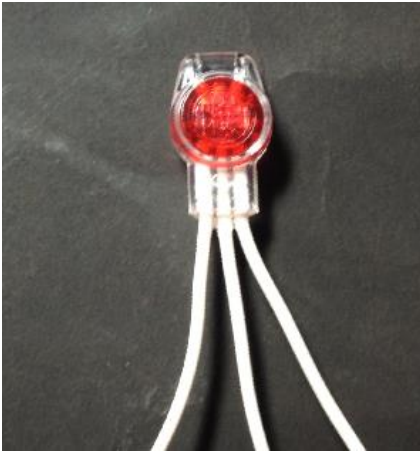


0.7mm * 3 connection

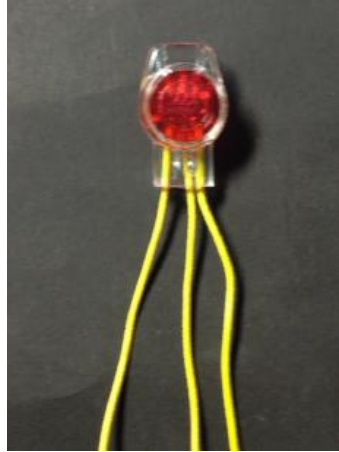


0.4mm * 3 connection

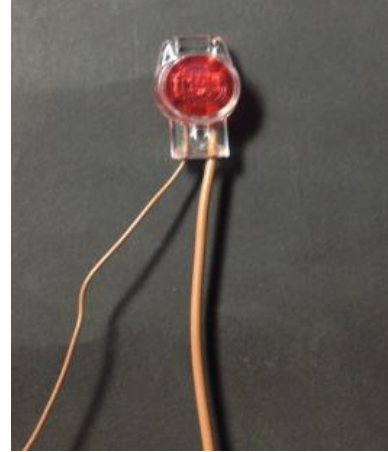

0.4mm*1 & 0.7mm*1

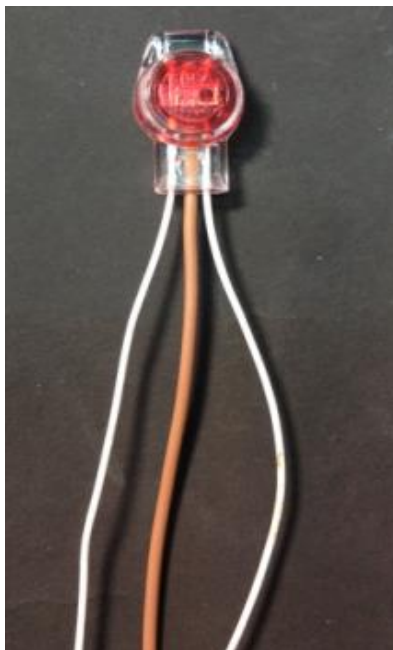

0.4mm*2 & 0.7mm*1

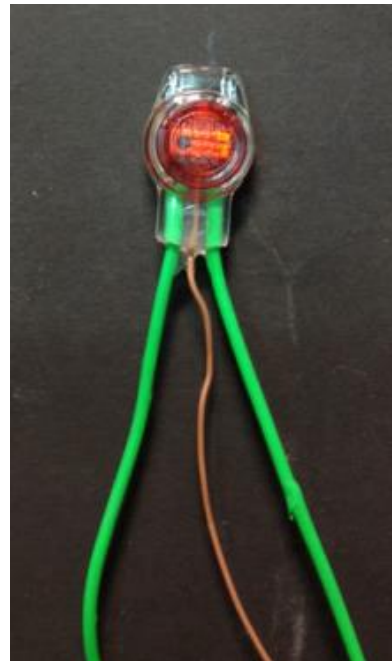

0.4mm*1 & 0.7mm*2

UY Connector



0.7mm * 2 connections




0.4mm * 2 connections




0.4mm*1 & 0.7mm*1

UB connector (subscribers)

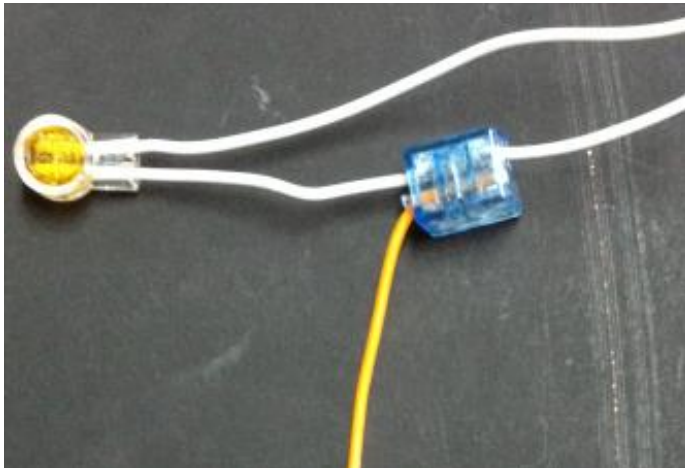

0.7mm

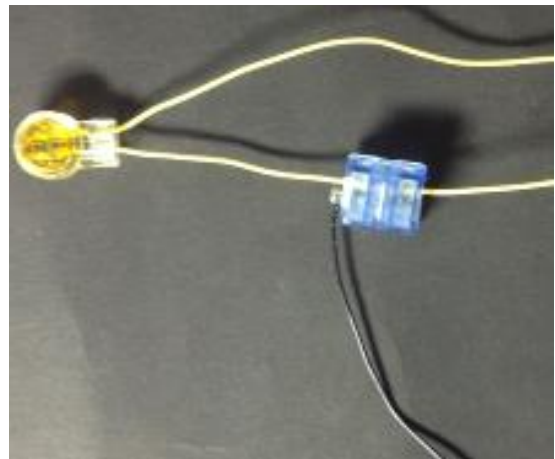

0.4mm

UCC wire terminator




0.7mm * 2 connection




0.4mm * 2 connection


UR2 connector

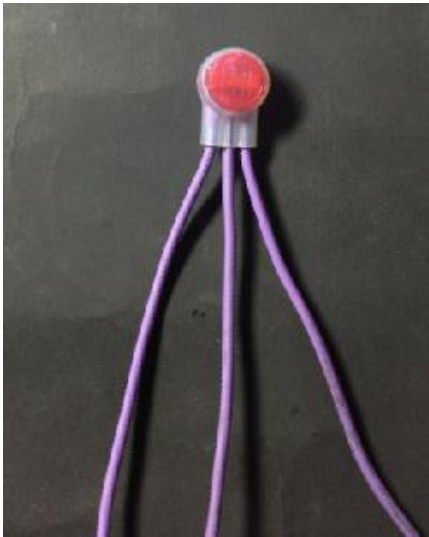


0.7mm * 3 connections

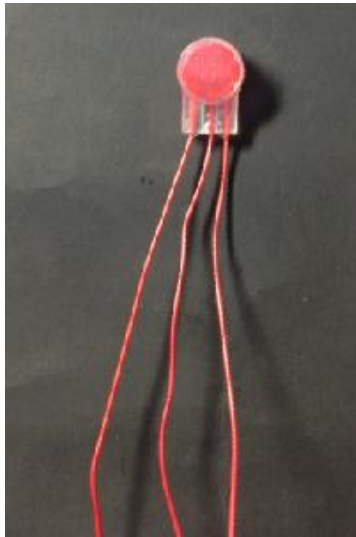

0.4mm * 3 connection

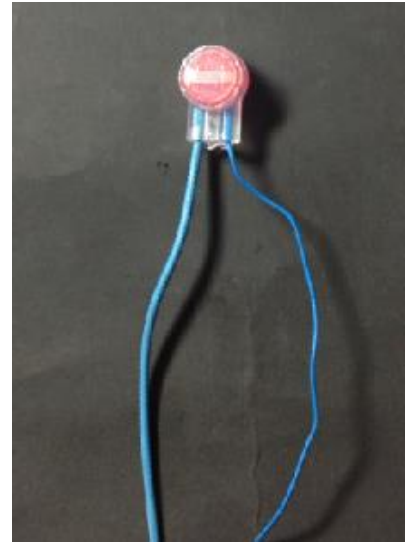

0.4mm*1 & 0.7mm*1

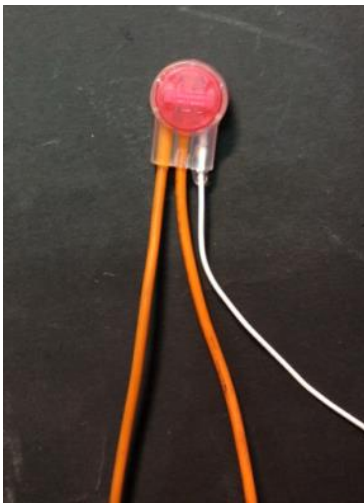

0.4mm*1 & 0.7mm*2




0.4mm*2 & 0.7mm*1


UY2 Connector



0.7mm * 2 connections

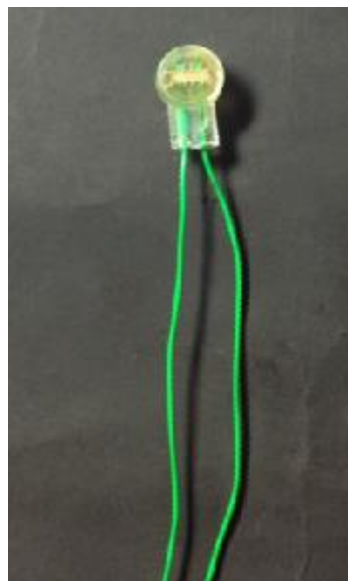


0.4mm * 2 connections

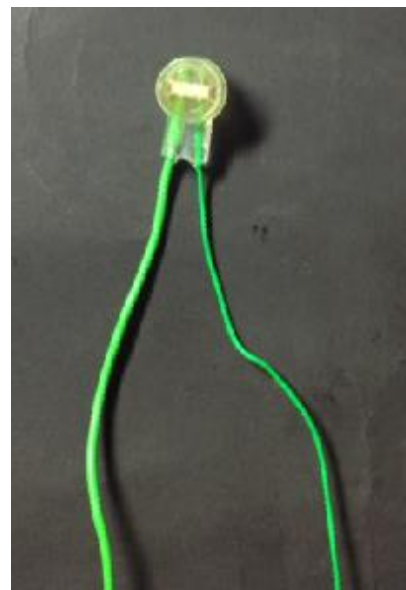

0.4mm*1 & 0.7mm*1

UT Connector

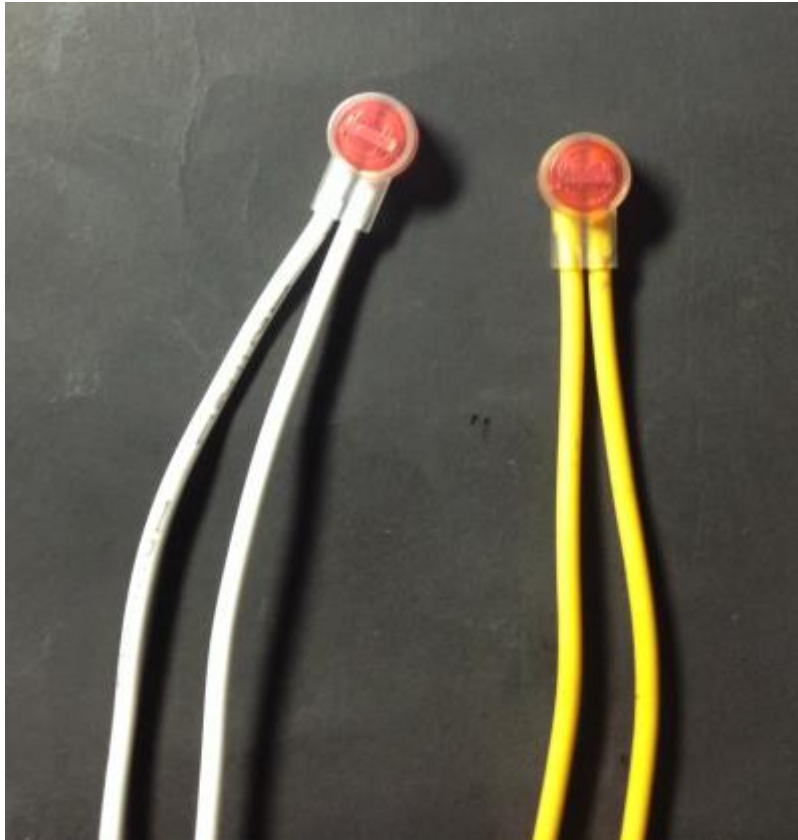

1.0mm * 2 connection (for AC power cable)